




stone

  
**WICANDERS®**  
Nature at your feet

**Amorim Revestimentos**  
Rua do Ribeirinho 202  
P. O. Box 13  
4536-907 S. Paio de Oleiros  
PORTUGAL

p\_ (+351) 227 475 600  
e\_ wicanders.ar@amorim.com  
[www.wicanders.com](http://www.wicanders.com)

# Enabling wellbeing in every room

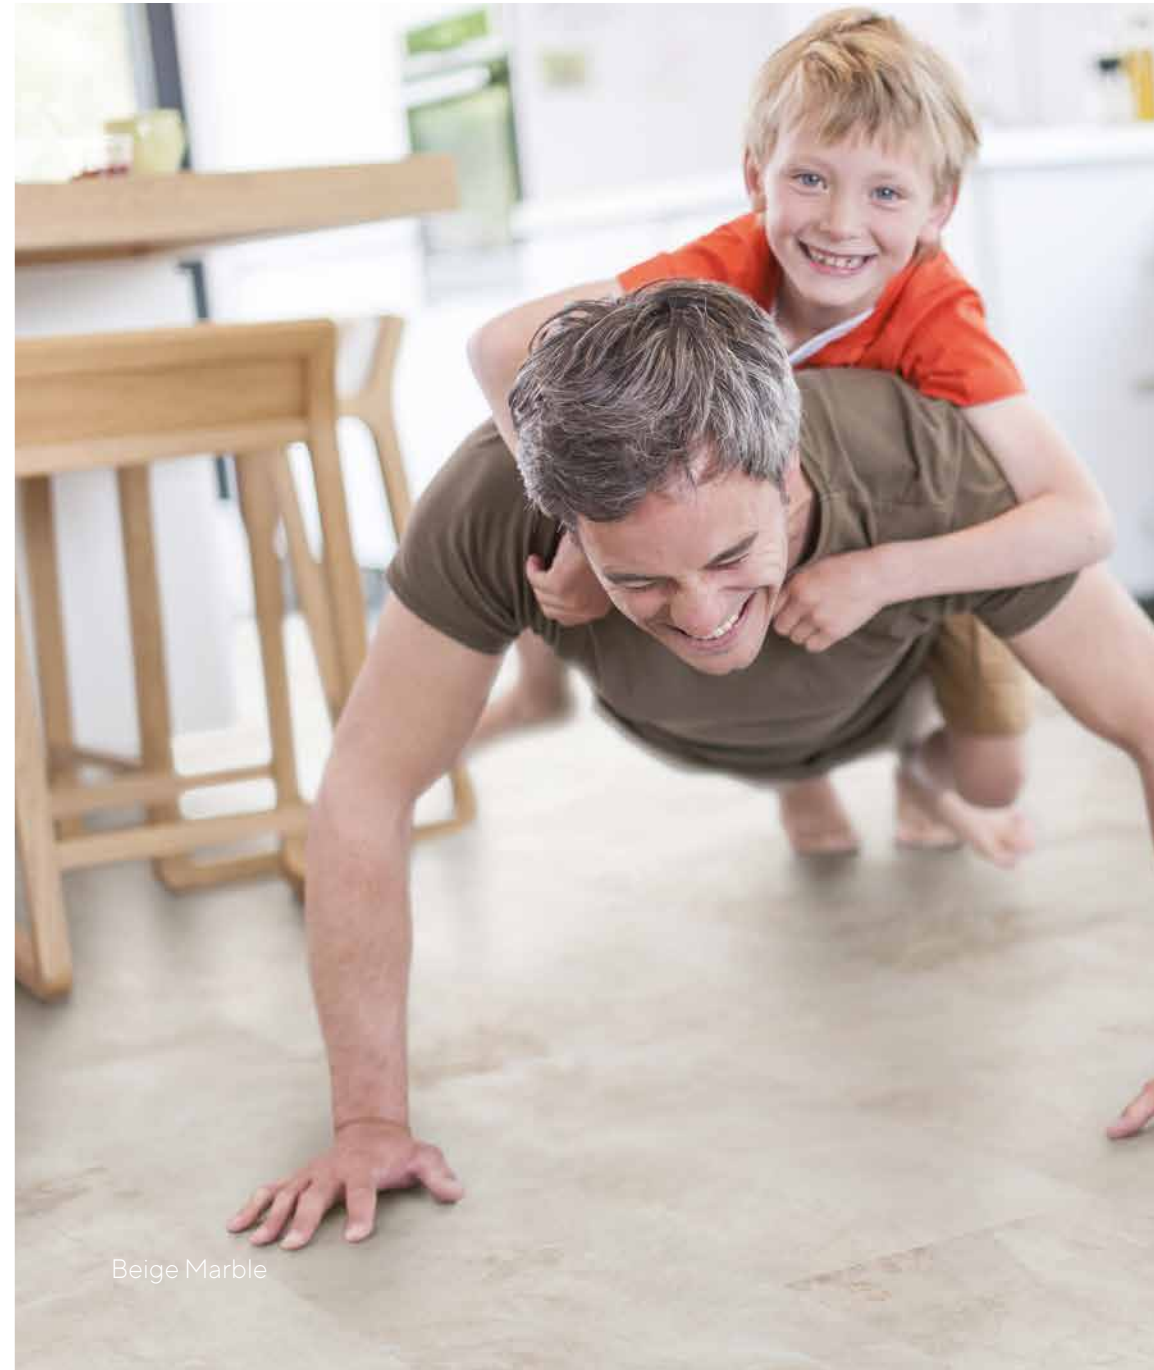

Beige Marble



Nature at your feet

Wicanders has a legacy that goes back to 1868 and is the global leading brand in flooring products with cork technology. Present in more than 70 countries, its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets, for all those wonderful and simple, yet sometimes unexpected moments. Floors for our lives.

Over the years, Wicanders has developed sustainable floor and wall coverings with exclusive properties due to its innovative Corktech technology. By combining state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment, that endures impacts and is very comfortable to walk and stand on.

Wicanders means wellbeing, a choice for life!

---











## FROM NATURE, TO YOUR SPECIAL SPACE.

Technology only makes sense if it improves people's lives. This concept finds expression in products developed with Corktech technology.

By using a unique engineered multilayer structure, which combines state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved, providing the perfect match between design and wellbeing.

Wicanders uniqueness is daily achieved by continuously research on how end customers think and live their spaces. Wicanders brings to the market products that provide a silent and thermally insulated environment, that endures through time and are sustainable at the same time.



**Silence**




**Natural  
Thermal Insulation**



**Walking Comfort**



**Impact  
Resistance**

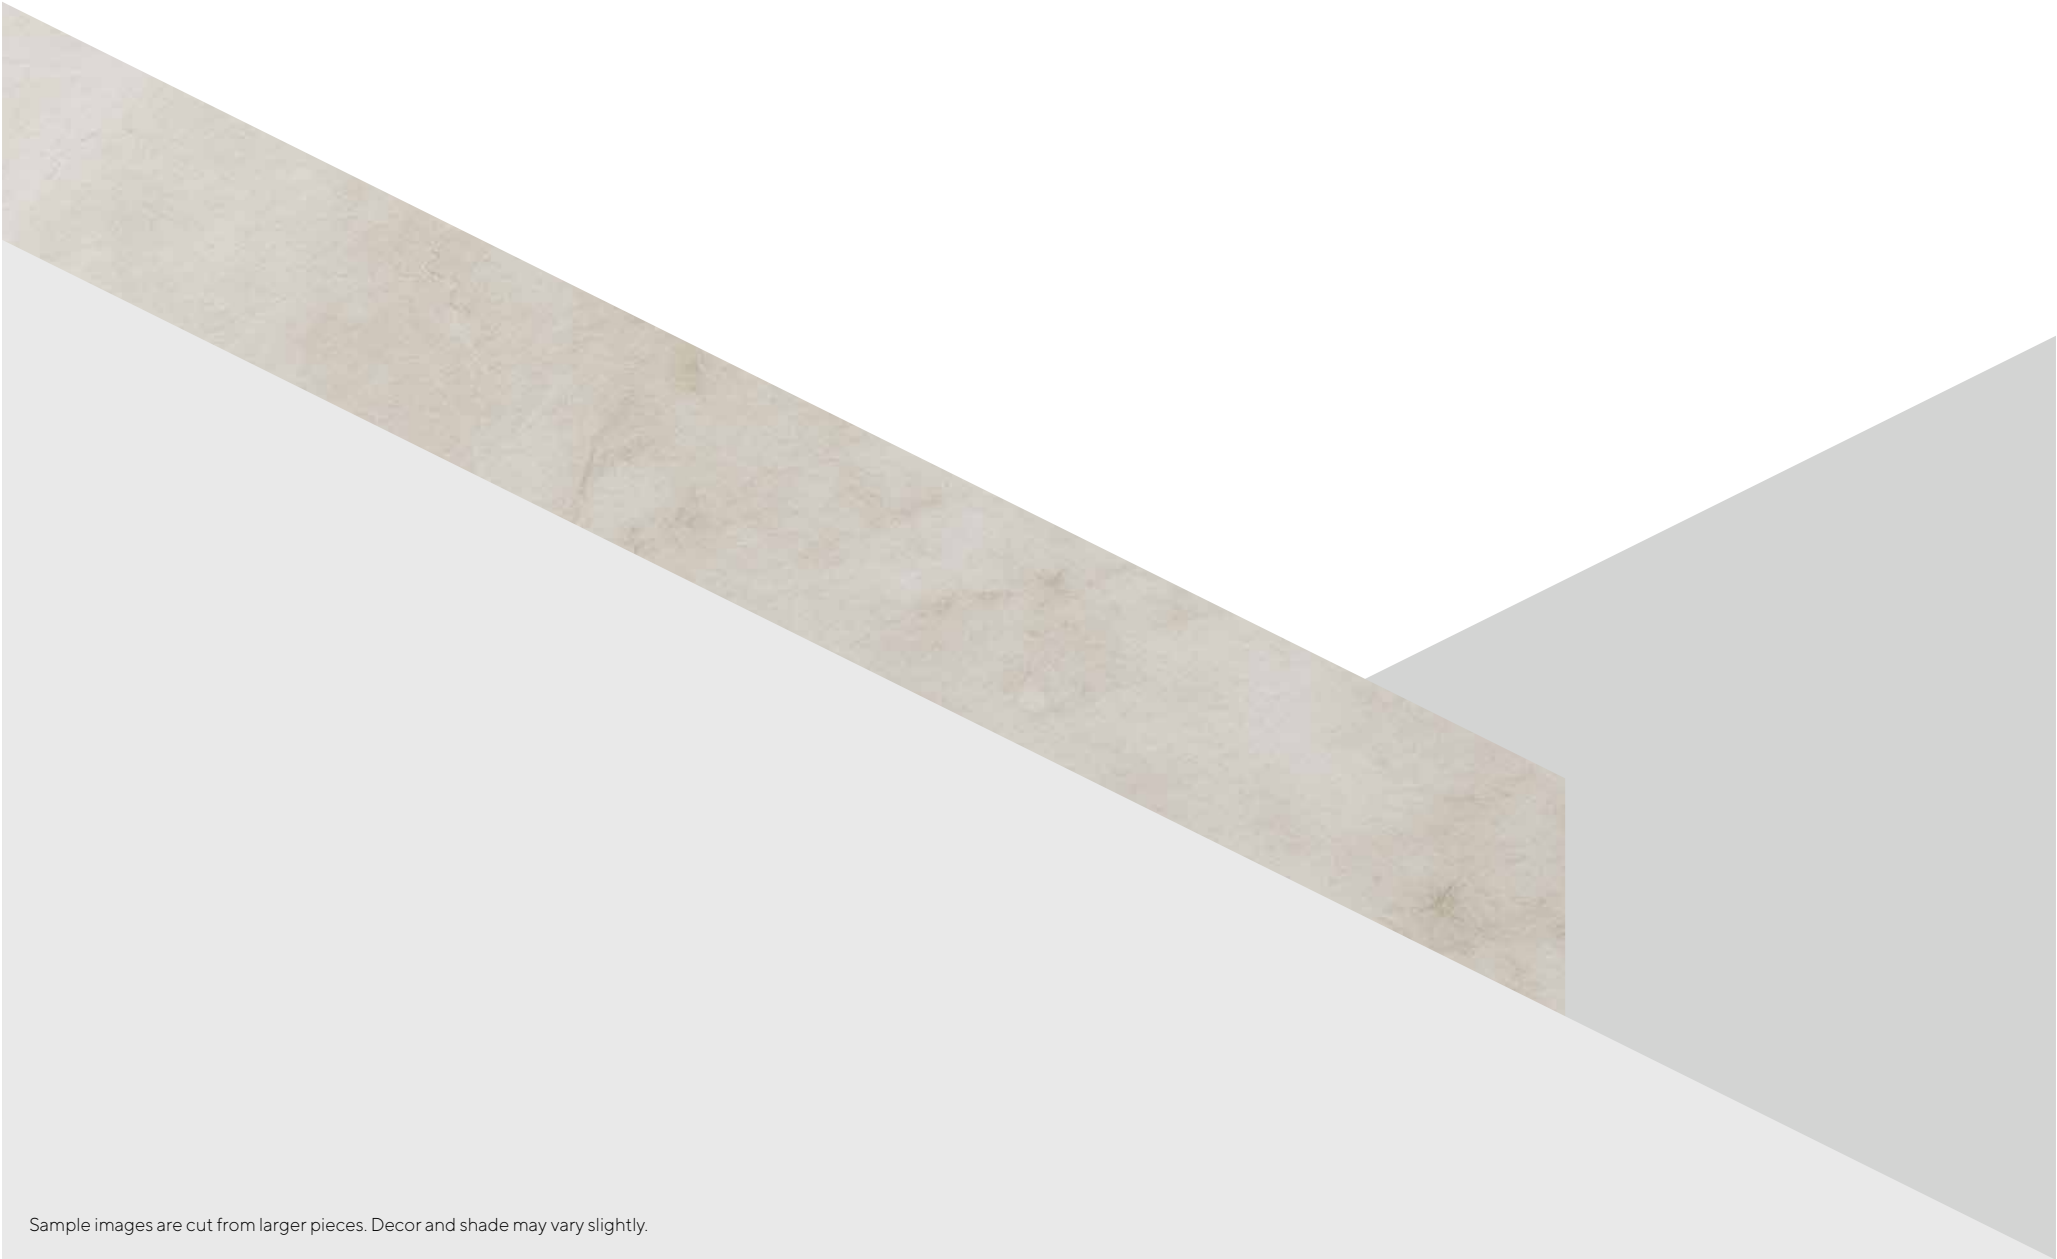

Sample images are cut from larger pieces. Decor and shade may vary slightly.

# stone


## Go


### Formats


905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"





|       |                     |   |   |   |
|-------|---------------------|---|---|---|
| RANGE | Go                  |    |    |    |
|       | Essence             |    |    |   |
|       | Resist <sup>+</sup> |  |  |  |
|       | Hydrocork           |  |  |  |

 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Aphanite Basalt





## Slate

# Serene and comforting like a hug.

The delicate nuances and gorgeous blend of neutral tones define the Slate look transforming any space into a serene and cosy ambiance.

For this look, we envision a design trend based on the fusion of a neutral colour palette, warm textures and natural woods for a contemporary and charming atmosphere.

This visual and texture delight creates an immediate sense of warmth and wellbeing in your home.



Cloudy Chalk Stone  
B0V6001







## Beton



Aphanite Basalt  
B0V5002





# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



## Finishing & Warranty



Suitable for Heavy Traffic Residential areas  
and Moderate Traffic Commercial areas.



# Technical Data Sheet

| Floating  |                           |                   |   |
|---|---------------------------|-------------------|---|
|   |                           |                   | 0,2mm Wear Layer<br>905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8"                     |
| Level of use Domestic                             | ISO 10874                 | Class             |  |
| Level of use Commercial                           | ISO 10874                 | Class             |  |
|   | Standard-Test Method      | Unit              | Specification EN 14085 + ISO 10582  |
| <b>General properties</b>                         |                           |                   |   |
| Dimensions  | ISO 24342                 | mm                | ± 0,10 up to max. 0,5 mm<br>max. 2,0 mm   |
| Overall thickness                                 | ISO 24346                 | mm                | ± 0,25  |
| Straightness measured at the surface layer        | ISO 24342                 | mm                | ≤ 0,30  |
| Squareness  | ISO 24342                 | mm                | ≤ 0,50  |
| Apparent density                                  | EN 672                    | Kg/m <sup>3</sup> | Nominal (930) ± 50  |
| Mass per unit area                                | ISO 23997                 | g/m <sup>2</sup>  | Nominal +13% / -10%   |
| Dimensional stability (humidity)                  | EN 669 (Annex C)          | mm                | ≤ 5   |
| Dimensional stability (heat)                      | EN 14085 Annex C / EN 669 | %                 | -   |
| Openings between panels                           | EN 14085 (Annex B)        | mm                | ≤ 0,20  |
| Height difference between panels                  | EN 14085 (Annex B)        | mm                | ≤ 0,20  |
| Flatness of the panel (Length - Concave / Convex) | EN 14085 (Annex A)        | %                 | ≤ 0,50 / ≤ 1,0  |
| Flatness of the panel (Width - Concave / Convex)  | EN 14085 (Annex A)        | %                 | ≤ 0,10 / ≤ 0,15   |
| Residual indentation                              | ISO 24343-1               | mm                | ≤ 0,15  |
| Colour fastness                                   | ISO 105-BO2               | Blue wool scale   | ≥ 6   |



| Floating |  |  |   |
|----------|--|--|---|
|          |  |  | <b>0,2mm Wear Layer</b><br><b>905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8"</b> |

#### Classification properties – EN 655 + EN 649 + EN 14085

|  |           |                                     |  |
|--|-----------|-------------------------------------|--|
| Wearing group                          | EN 660-1  | Thickness loss (ΔImm)               | -  |
| Overall thickness (Vinyl + Cork layer) | ISO 24346 | mm                                  | -  |
| Thickness of wear layer (Wear Group T) | ISO 24340 | mm                                  | 0,2  |
| Castor chair                           | EN 425    | Visual effect – after 25 000 cycles | No disturbance to the surface other than slight change in appearance and no delamination shall occur |
| Simulated movement of a furniture leg  | EN 424    | Visual effect                       | No damage shall be visible after testing with a type 2 foot  |

#### Safety properties – EN 14041

|                                 |                          |       |              |
|---------------------------------|--------------------------|-------|--------------|
| Fire resistance                 | EN 13501-1               | Class | Bfl s1       |
| Slip classification             | EN 13893                 | Class | DS           |
| Formaldehyde emission           | DIN EN 717-1             | Class | E1           |
| Electrical behaviour            | EN 1815                  | kV    | Antistatic   |
| Content pentachlorophenol (PCP) | CEN/TR 14823 (ihd-W 409) | mg/Kg | -            |
|                                 | EN 14041 Annex B         | %     | Undetectable |

#### Additional properties

|                        |               |          |  |
|------------------------|---------------|----------|--|
| Stains resistance      | ISO 26987 (a) | Grade    | Grade 0 (b)  |
| Thermal resistance     | EN 12667      | (m²K)/W  | R <0,15  |
| Impact sound reduction | ISO 140-8     | dB (ΔLw) | 16   |
| Walking noise          | IHD – W431    | dB (A)   | Reduction improvement 11,4 dB (A) Difference of loudness 45,4% |



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



(a) The following products were tested: disinfectant, C<sub>2</sub>H<sub>5</sub>OH, NH<sub>4</sub>OH, citric acid, iodine, petroleum, spirit.

(b) Grade 0 – Unchanged / Grade 1 – Very little change / Grade 2 – Little change / Grade 3 – Change / Grade 4 – Strong Change.

\* Except Iodine – Grade 2 – Little change.

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on [www.wicanders.com](http://www.wicanders.com)

# Get the best results with Wicanders accessories



## Underlays

### Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork reduces the walking sound and heat dispersion. Overall, it makes rooms cosier and more peaceful, which is essential in making any house feel like home.

For Hydrocork products, if you wish to use underlay, please consult Wicanders website or your supplier for more information.

- High durability and long term resilience
- Increases floor thermal insulation
- Natural and sustainable product
- Easy to handle and install





## Maintenance

### Optimal care for an everlasting beauty

To keep your floor spotless, Wicanders has available a set of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

#### Regular Maintenance



##### **Wicanders Soft Cleaner**

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.



##### **Wicanders Spray Cleaner**

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.



## **Skirtings**

### The perfect match to make a pleasant interior

In order to help create a more classy and harmonious interior, Wicanders provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colours.

Contact your supplier for information on the available skirting references.



## CREATED BY HUMANS, INSPIRED BY NATURE

Wicanders represents an unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.



**A green production process** – Cork waste resulting from the industrial process is 100% reincorporated into the production, creating an ecologically virtuous cycle.



**Intensive use of biomass** – The cork powder resulting from the industrial process is burned in order to create biomass which is then used as a major source of energy to supply the production facilities, allowing Wicanders also to base its production in a sustainable source of energy.



**Low carbon emission** – Cork's natural property of retaining CO<sub>2</sub> combined with an eco-sustainable industrial process allows Wicanders to develop eco-efficient products with a low carbon emissions factor, positively contributing to a sustainable environment.



**Indoor Air Quality** – Refined to be free of harmful phthalates Wicanders products have been awarded with worldwide indoor air quality certifications such as Greenguard Gold or A+.



**Negative Global Warming Potential** – The majority of Wicanders products contribute to reduce global warming, since they retain more CO<sub>2</sub> than they emit.



# CORK - A SUSTAINABLE RAW MATERIAL

Cork comes from the bark of the Cork Oak, a slowly growing tree from the Mediterranean basin that may live for 200 years and plays a central role in the social and economic development of this region.



**Truly environmental-friendly** - The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut or damaged during the extraction process and the bark regenerates after each harvest.



**Positive ecological impact** - It is estimated that the Portuguese cork oak forest - Montado - is responsible for retaining 5% of the country's annual CO<sub>2</sub> emission, representing 4.8 million tons per year.




**An activity that crosses generations** - Cork Oaks are manually harvested for the first time when the tree is 25 years old and then every 9 years making it an activity that passes from generation to generation.



**A positive economic and social impact** - Cork harvesting is a regular and cyclical process that contributes to environmental, economic and social sustainability of the rural areas in the Mediterranean region.



**Rural areas economic engine** - The cork activity as well as related activities fueled by this industry create jobs in many rural areas of the country, encouraging people to settle there.

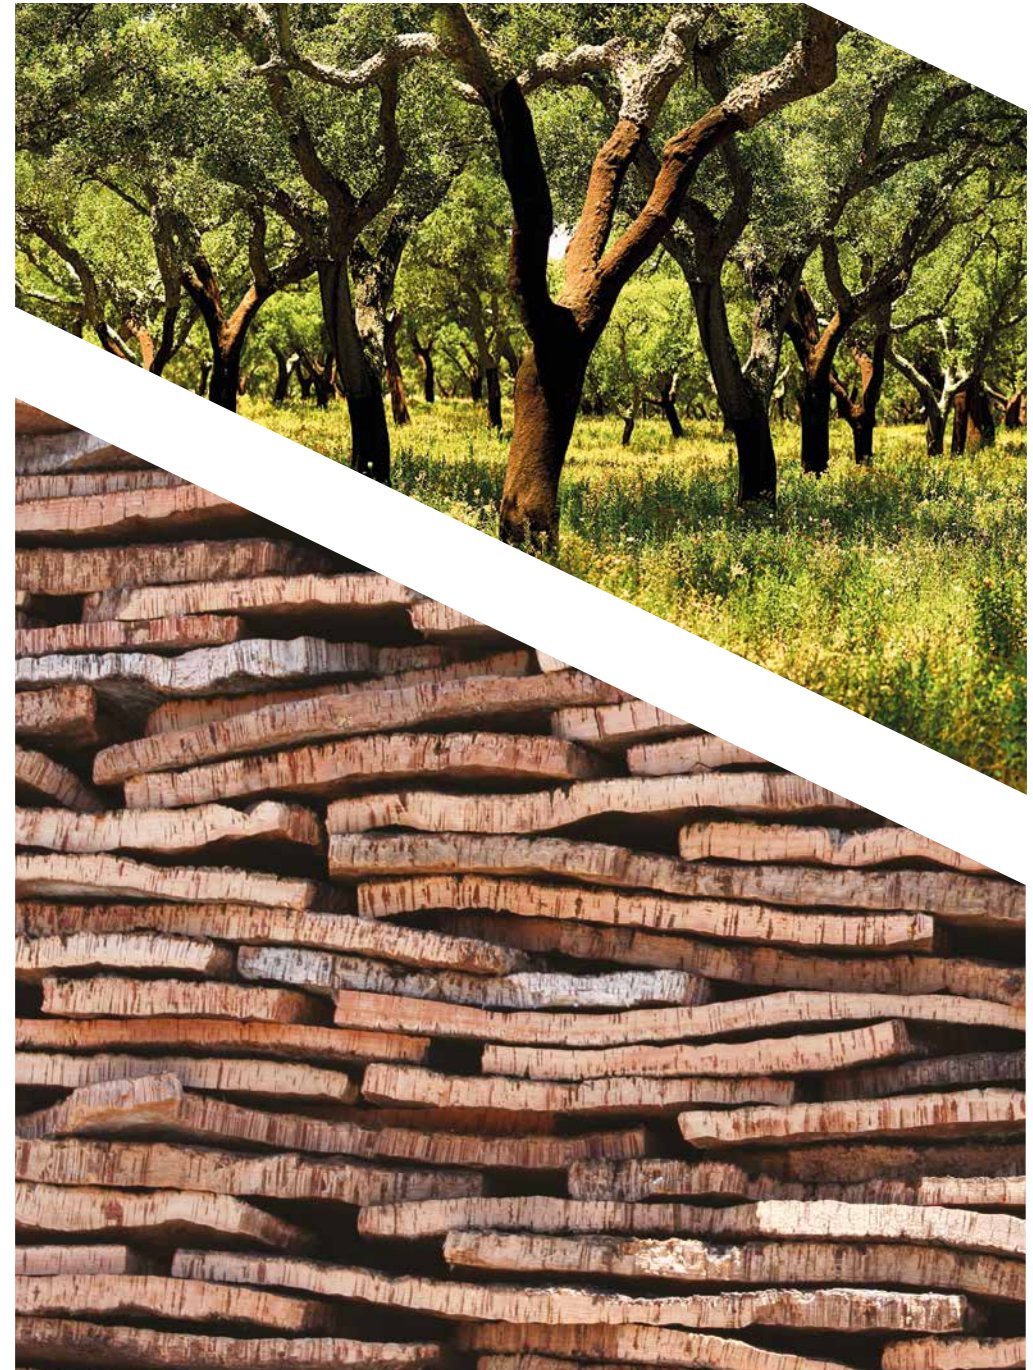






































# Product Selector

| RANGE                    | Go   | Essence                                    |  | Resist <sup>+</sup>                        | hydracork                                |
|--------------------------|--|--|--|--|--|
| FINISHING                | 0,2mm Wear Layer                           | NPC  |  | 0,55mm Wear Layer                          |  |
| CLASS OF USE (ISO 10874) | 23 Residential   31 Commercial             | 23 Residential   32 Commercial             |  | 23 Residential   33 Commercial             |  |
| BEVEL                    | No Bevel                                   |  |  | 4 Side Micro Bevel                         |  |
| DIMENSION (mm   inches)  | 905 x 295 x 10.5<br>35 5/8 x 11 5/8 x 3/8" | 905 x 295 x 10.5<br>35 5/8 x 11 5/8 x 3/8" | 605 x 445 x 10.5<br>23 13/16 x 17 1/2 x 3/8" | 905 x 295 x 10.5<br>35 5/8 x 11 5/8 x 3/8" | 615 x 295 x 6<br>24 7/32 x 11 5/8 x 1/4" |
| Aphanite Basalt          | BOV5002                                    |  |  |  |  |
| Arabian Slate            |  |  |  | E1XP001                                    |  |
| Basque Slate             |  |  |  | E1XR001                                    |  |
| Beige Marble             |  |  |  | E1XV001                                    | B5XV001                                  |
| Beton Ashen              |  | D816003                                    |  |  |  |
| Black Marble             |  |  |  | E1XY001                                    |  |
| Chalked Grey Stone       |  |  |  |  | B5V6001                                  |
| Cliff Slate              |  |  |  | E1XQ001                                    |  |
| Cloudy Chalk Stone       | BOV6001                                    |  |  |  |  |
| Dark Beton               |  |  |  |  | B5V5001                                  |
| Graphite Marble          |  |  |  | E1XX001                                    | B5XX001                                  |
| Grey Marble              |  |  |  | E1XU001                                    |  |
| Jurassic Limestone       |  |  |  | E1XS001                                    | B5XS001                                  |
| Light Grey Marble        |  |  |  | E1XW001                                    | B5XW001                                  |
| Saurian Lime             |  |  |  | E1XT001                                    |  |
| Travertine Argent        |  |  | D818003                                      |  |  |

# Wicanders' range

| LOOKS |                     |   |  |   |
|-------|---------------------|---|--|---|
|       | cork                | wood  | stone  |   |
| RANGE | Go                  |          |          |          |
|       | Essence             |     |     |     |
|       | Resist              | —   |     | —   |
|       | Resist <sup>+</sup> |     |          |          |
|       | Hydrocork           | —   |    |    |
|       | Pure                |    | —  | —   |
|       | Parquet             | —   | <br>Engineered wood   | —   |



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Medium Traffic Commercial areas



Heavy Traffic Commercial areas



Budget products



Glue down



Extra Cork



Waterproof



Nature at your feet



**HeadQuarters**

Amorim Revestimentos S.A  
(+351) 227 475 600  
geral.ar@amorim.com

**www.wicanders.com**

|                  |   |                          |
|------------------|---|--------------------------|
| <b>DE</b>        | Amorim Deutschland GmbH (+49) 4221 5 93-01 .....        | germany.ar.de@amorim.com |
| <b>BE NE LUX</b> | Amorim Benelux B.V. (+31) 166 604 111 .....             | info.ar.nl@amorim.com    |
| <b>AT</b>        | Amorim Deutschland GmbH (+43) 1 54 51 65 10 .....       | austria.ar.de@amorim.com |
| <b>CH</b>        | Amorim Flooring Switzerland AG (+41) 41 726 20 20 ..... | info@amorim.ch           |
| <b>PT</b>        | Amorim Revestimentos, S.A. (+351) 227 475 600 .....     | geral.ar@amorim.com      |
| <b>ES</b>        | Amorim Revestimentos, S.A. (+34) 902 307 407 .....      | info.ar.es@amorim.com    |
| <b>FR</b>        | Amorim Revestimentos, S.A. (+33) 800 914 848 .....      | info.ar.fr@amorim.com    |
| <b>DK</b>        | Timberman Denmark A/S (+45) 995 252 52 .....            | timberman@timberman.dk   |
| <b>PL</b>        | Dom Korkowy, Sp. z o.o. (+48) 126 379 639 .....         | krakow@domkorkowy.pl     |
| <b>US</b>        | Amorim Flooring North America (+1) 410 553 60 62 .....  | info.ar.us@amorim.com    |
| <b>RU</b>        | Amorim Flooring Rus, OOO (+7) 495 280 7860 .....        | info.ar.ru@amorim.com    |

